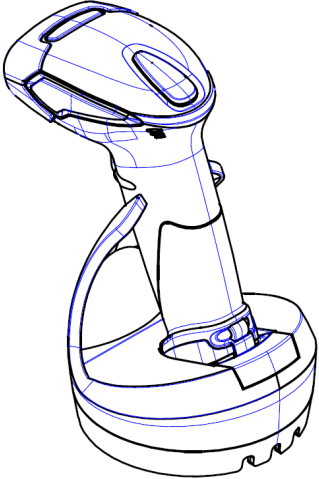


# [ Buyer's Guide ]

## Z-3192BT Plus Wireless Gun Type 2D Image Reader

### Device Pin-Out

	USB-C PIN-OUT CONFIGURATION			
	Pin	Function	Pin	Function
	A1	GND	B12	GND
	A4	VBUS	B9	VBUS
	A6	D+	B7	D-
	A7	D-	B6	D+
	A9	VBUS	B4	VBUS
	A12	GND	B1	GND
	CRADLE PHONE JACK PIN-OUT CONFIGURATION			
	RJ 1.	RTS_EIA	RJ 6.	RX_EIA
	RJ 2.	KB Data / USB_D+	RJ 7.	KB Clock
	RJ 3.	PC Clock / USB_D-	RJ 8.	+5V
	RJ 4.	GND	RJ 9.	PC Data
	RJ 5.	CTS_EIA	RJ10.	TX_EIA

P/N	Model Name	Remark
88H-9BB500-001	Z-3192BT Plus (B)	Gun Type Wireless 2D Image Handheld Scanner Black USB BA
88H-9BB5UB-AC1	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle AU adapter BA
88H-9BB5UB-EC1	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle EU adapter BA
88H-9BB5UB-KC1	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle UK adapter BA
88H-9BB5UB-UC1	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle US adapter BA
88H-9BB500-007	Z-3192BT Plus (B)	Gun Type Wireless 2D Image Handheld Scanner Black USB w/o battery
88H-9BB5UB-AC7	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle AU adapter w/o battery
88H-9BB5UB-EC7	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle EU adapter w/o battery
88H-9BB5UB-KC7	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle UK adapter w/o battery
88H-9BB5UB-UC7	Z-3192BT Plus (U)(B)(CR)	Gun Type Wireless 2D Image Handheld Scanner Black USB Cradle US adapter w/o battery

# [ Buyer's Guide ]

## Standard Cable Options

### 1. USB-C Charging Cable

		PIN-OUT CONFIGURATION			
		USB-C		USB A TYPE	
		A1/B12	GND	1	Vcc+
		A4/B9	VBUS	2	D-
		A6/B6	D+	3	D+
		A7/B7	D-	4	GND
		A9/B4	VBUS		
A12/B1	GND				
<b>Item Part No.</b>	170-00U314-150				






### 2. USB Communication Cable


		USB TYPE A CONNECTOR	FUNCTION
		1.	VCC
		2.	D-
		3.	D+
		4.	GND
<b>Item Part No.</b>	170-15U304-300		

## Optional Accessory

<b>Description</b>	RS-95, Communication & Charging Cradle for Z-319XBT Series		
<b>Barcode</b>	<b>P/N</b>	<b>Remark</b>	
	88H-90RSZT-051	Black Housing, Metal Base	

# [ Buyer's Guide ]


Description	USB AC Adaptor (5V 2A)	
Barcode	P/N	Remark
	11S-000002-01B	Universal adaptor w/o plug
	11S-000001-01B	US plug
	11S-000003-01B	European plug
	11S-000002-01B	Australian plug
	11S-00000C-01B	UK plug

Description	Lithium-Ion Battery	
Barcode	P/N	Remark
	191-932004-20L	3.6V, 3200mAH

## Battery Information

The scanner operates wirelessly using a single 18650 battery that can be charged in the device. However, only flat-top batteries, with both ends flat, are compatible. Ensure you use the correct battery type to avoid operational issues.

### 18650 Battery

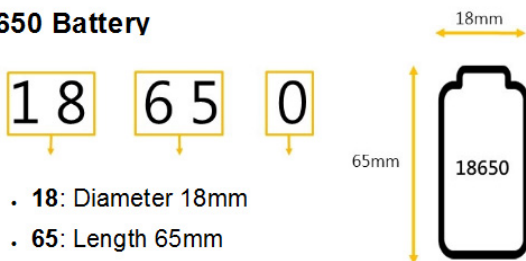

- 18: Diameter 18mm
- 65: Length 65mm
- 0: Cylindrical battery type



**Flat Top**

- The positive and negative ends of the battery are both flat.



**Button Top**

- The positive terminal has a protruding bump or dot.



**Protected Board**

- The battery includes a protection circuit board.



**Protected Board**

